


TEFLON* FLANGE SHIELDS.



PROTECTION WITHOUT A COVER UP

- 100 PER CENT CHEMICALLY INERT
TEFLON* FEP
- TRANSPARENT – ALLOWS VISUAL INSPECTION TO
ENSURE NO CORROSION OF BOLTS, NUTS OR
FLANGES
- LEAKS IMMEDIATELY VISIBLE

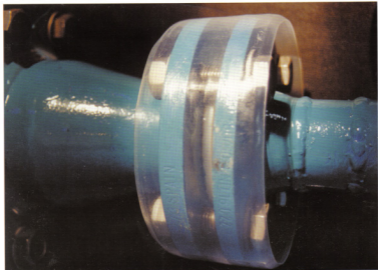

Nominal Pipe size	A	B	D
13mm (1/2")	38mm (1 1/2")	50mm (2")	89mm (3 1/2")
19mm (3/4")	44mm (1 3/4")	57mm (2 1/4")	98mm (3 7/8")
25mm (1")	44mm (1 3/4")	57mm (2 1/4")	108mm (4 1/4")
32mm (1 1/4")	50mm (2")	64mm (2 1/2")	117mm (4 5/8")
38mm (1 1/2")	50mm (2")	64mm (2 1/2")	125mm (5")
50mm (2")	54mm (2 1/8")	67mm (2 5/8")	150mm (6")
64mm (2 1/2")	64mm (2 1/2")	75mm (3")	178mm (7")
75mm (3")	64mm (2 1/2")	75mm (3")	190mm (7 1/2")
89mm (3 1/2")	67mm (2 5/8")	83mm (3 1/4")	216mm (8 5/8")
100mm (4")	67mm (2 5/8")	83mm (3 1/4")	225mm (9")
150mm (6")	83mm (3 1/4")	100mm (4")	279mm (11")
200mm (8")	83mm (3 1/4")	121mm (4 3/4")	343mm (13 1/2")
254mm (10")	95mm (3 3/4")	121mm (4 3/4")	406mm (16")
305mm (12")	105mm (4 1/4")	130mm (5 1/4")	483mm (19")

- DESIGNED FOR QUICK
INSTALLATION, REMOVAL AND RE-USE
- HEAT SHRINKABLE
- COMPLETELY U.V. STABLE
- TEMPERATURE RANGE – SUITABLE FOR
CONTINUOUS OPERATION FROM -20°F
(-29°C) to 300°F (150°C)
- AVAILABLE WITH OR WITHOUT LIPPED EDGES

Holscot FEP Flange Shields are simple to install – just wrap around the flange, line up the fasteners with corresponding holes and snap into place. No tools required – no special skills.

The Holscot FEP Flange Shield has been designed to shrink diametrically when exposed to elevated temperatures. This can be achieved either by use of a hot air gun, or, when the pipe system where the shield is installed operates at high temperatures, the shield will automatically shrink.

Our standard range of sizes – designed for ASA/ANSI 150 flanges – is shown opposite. Shields to fit non-standard flanges – or valves – can be produced.

Quotations available on request.

HOLSCOT

Fluoroplastics Limited
Ains Park Road, Ains Park Industrial Estate
Grantham, Lincs. NG21 5SE, England
Telephone: (01476) 514771
Fax: (01476) 502562
E-mail: enquiries@holscot.com
Web Site: www.holscot.com

Holscot Northern Division
Unit 3, Burnmill Ind. Estate, Burnmill,
Levens, Fife KY8 4SA, Scotland
Telephone: Levens (01333) 427 555
Fax: (01333) 429299